


KBU6005 THRU KBU610

GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 6.0 Ampere

FEATURES

- ◆ Surge overload rating -150 amperes peak
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ Plastic material has UL
- ◆ Mounting position:Any
- ◆ Mounting torque:5 In.lb.Max
- ◆ Weight: 0.23ounces ,6.55grams

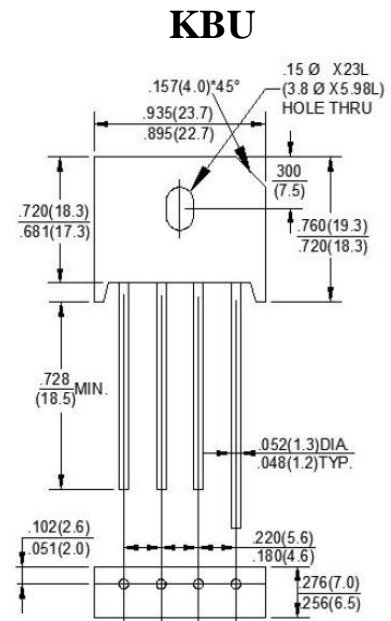

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	KBU 6005	KBU 601	KBU 602	KBU 604	KBU 606	KBU 608	KBU 610	UNIT
Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current at T _A =50°C/40°C/45°C	6.0							A
Peak Forward Surge Current 8.3ms single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	150							A
Maximum Instantaneous Forward Voltage Drop per leg at 3.0A	1.1							V
Maximum Reverse Leakage at rated T _A =25°C DC Blocking Voltage Per Element T _A =100°C	10							μA
	1000							mA
Operating and Storage Temperature Range T _J .T _{STG}	-55 to +150							°C

KBU6005 THRU KBU610

GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 4.0 Ampere

GLASS PASSIVATED BRIDGE RECTIFIERS RATING AND CHARACTERISTIC CURVES

FIG.1-DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT

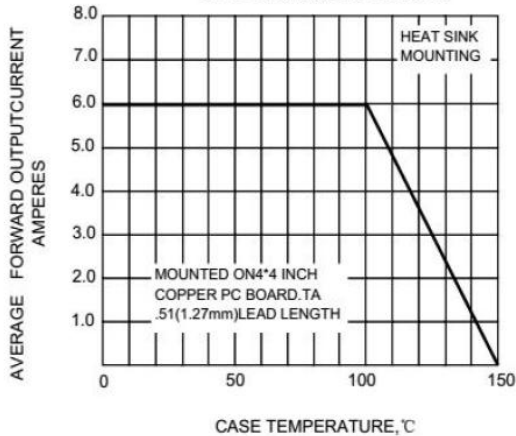


FIG.2 TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTIC

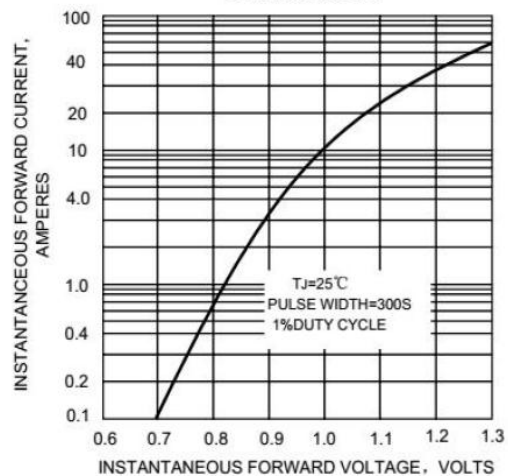


FIG.3-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

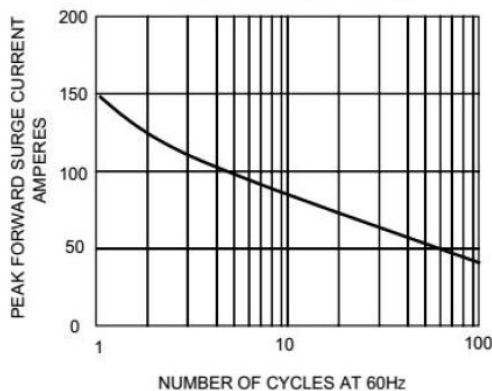


FIG.4-TYPICAL REVERSE
CHARACTERISTICS


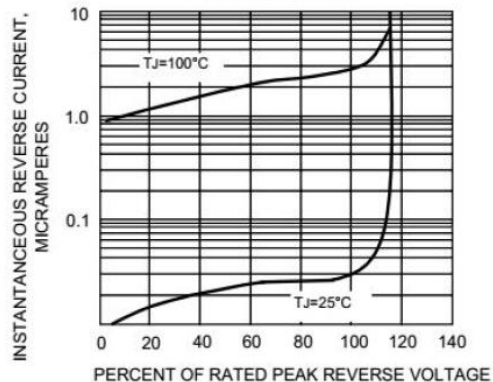


FIG.5-TYPICAL JUNCTION CAPACITANCE PER ELEMENT

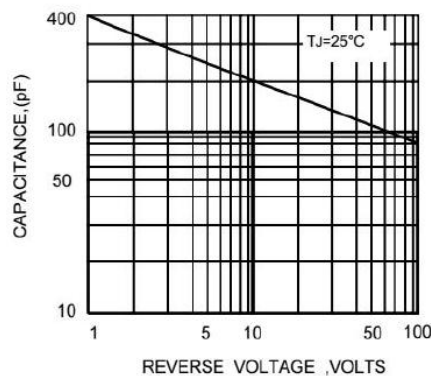

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.